

bSure

multimedia projector



- low cost of ownership
- most silent in the business
- easy-to-use
- high picture quality
- protected with SecurityMax™




Let's make things better.



PHILIPS

bSure

technical specifications

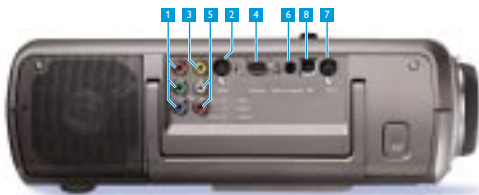

For optional* accessories please contact your dealer.

Technical specifications	LC3131 (bSure SV1)	LC3141 (bSure XG1)
LCD	3x 0.7" high-temperature poly-silicon active matrix LCDs	
Resolution	SVGA	XGA
Brightness	1200 ANSI lumens	1200 ANSI lumens
Lamp	132W	150W
Contrast	300:1	300:1
Average lifetime	6000 hours	3000 hours
Fan noise	27 dB	29 dB

Lens	F/1.8 - 2.2 ; f = 28.4 - 34 mm; 1.2x Manual Zoom; Manual Focus 1.2x Manual Zoom; Manual Focus Projection distance 1.1 - 10 m (image diagonal 27.5" - 250")
-------------	--

Input signals	NTSC 3.58, 4.43 ; PAL B,G,D,H,I,N,M ; SECAM S-video/S-VHS (Y/C)																		
Video	Component video input RGB-Y,CbCr,YPbPr (480p,720p,1080i)																		
Computer	PC and MAC compatible, Multi scan VGA-SXGA Horizontal scan rate: 15 - 108 kHz Vertical refresh rate: 50 - 120 Hz Bandwidth: 140 MHz																		
Plug and play	Display Data Channel DDC 1/2B																		
Compatibility	Microsoft® Windows® 95/98/ME/2000/XP compatible																		
Input connectors	<table border="0"> <tr> <td>Video</td> <td>1 Component in R/Pr/Cr/G/Y/B/Pb/Cb (3x RCA)</td> </tr> <tr> <td></td> <td>2 1x S-Video (Y/C DIN)</td> </tr> <tr> <td></td> <td>3 1x CVBS Video (RCA)</td> </tr> <tr> <td></td> <td>4 1x Data in (15p D-sub)</td> </tr> <tr> <td>Computer</td> <td></td> </tr> <tr> <td>Audio</td> <td>5 Audio L/R (2x RCA)</td> </tr> <tr> <td>Video</td> <td>6 1x Stereo Audio (3.5 mm stereo jack)</td> </tr> <tr> <td>Data</td> <td>7 PS/2 (Mini Din)</td> </tr> <tr> <td>Mouse</td> <td>8 USB (type A)</td> </tr> </table>	Video	1 Component in R/Pr/Cr/G/Y/B/Pb/Cb (3x RCA)		2 1x S-Video (Y/C DIN)		3 1x CVBS Video (RCA)		4 1x Data in (15p D-sub)	Computer		Audio	5 Audio L/R (2x RCA)	Video	6 1x Stereo Audio (3.5 mm stereo jack)	Data	7 PS/2 (Mini Din)	Mouse	8 USB (type A)
Video	1 Component in R/Pr/Cr/G/Y/B/Pb/Cb (3x RCA)																		
	2 1x S-Video (Y/C DIN)																		
	3 1x CVBS Video (RCA)																		
	4 1x Data in (15p D-sub)																		
Computer																			
Audio	5 Audio L/R (2x RCA)																		
Video	6 1x Stereo Audio (3.5 mm stereo jack)																		
Data	7 PS/2 (Mini Din)																		
Mouse	8 USB (type A)																		

Features	SecurityMax™ Theft protection SmartSet™ automatic image quality optimisation SmartSave™ auto-standby mode to increase effective lamp usage Colour Tracking™ Digital Keystone correction, Digital Zoom and -Freeze Connect an external monitor via Y-cable on the RGB connector 6W speaker
Dimensions	235 x 335 x 108 mm (9.2" x 13.2" x 4.2") (WxDxH)
Net weight	3.7 kg; 8.1 lbs

Power consumption	Operating voltage 100 - 240V, 50/60 Hz	
Operation	170W	210W
Standby	5W	
Temperature range	Operational +5 to +35 °C (+41 to +95 °F)	
Storage	-25 to +70 °C (-13 to +158 °F)	
EMC approbation	Class B	

Package	Compact remote control Power cord Combined VGA-USB cable (1.5m) Audio/Video cable (2m) Scart adapter (scart to RCA audio/video) Lenscap CD-ROM User Guide (UK, D, F, E, PT, NL, I), Chinese version printed in region. Quick Setup Card (UK, D, F, E, PT, NL, I) Warranty card + envelopes 132W replacement lamp (LCA3116/00) 150W replacement lamp (LCA3118/00) Softbag (LCA 1120/00) Ceiling mount (LCA2211/00) VGA extension cable, 15 metres (LCA5300/00) Monitor Y-cable (LCA5310/00)
Optional accessories	

Executions	LC3131/17 USA version LC3131/40 RoW version LC3131/45 UK version	LC3141/17 USA version LC3141/40 RoW version LC3141/45 UK version
-------------------	--	--

* : depending on regional requirement

Image diagonal size	Projection distance					
	Tele zoom		Wide zoom			
[inch]	[metres]	[inch]	[metres]	[inch]	[metres]	[metres]
40	1.0	74	1.9	01	1.5	
60	1.5	112	2.8	91	2.3	
70	1.8	130	3.3	106	2.7	
80	2.0	150	3.8	121	3.1	
100	2.5	187	4.7	152	3.9	
150	3.8	280	7.1	228	5.8	
200	5.1	374	9.5	304	7.7	
250	6.4	468	11.9	380	9.7	

www.ce.philips.com

The Philips Guarantee

The Philips range of advanced multimedia projectors combines portability, reliability and unsurpassed performance with a host of technological innovations. All of which ensures that you enjoy impressive and hassle-free projection wherever you are. What else would you expect from the innovative world leader in sound and vision technology?

3-years warranty and free support

Every bSure projector comes with a full three-year warranty. This unique offer is backed up by the outstanding Philips First Choice* services, including a toll-free helpline,

that offers you assistance and advice seven days a week. For more difficult problems, you're guaranteed a temporary replacement with free delivery, within 48 hours. It's simply an unbeatable package.

Extreme compatibility

Philips projectors are extremely compatible with a whole range of data and video sources, thanks to their highly advanced scaling technology, which converts signals without any loss or deterioration. It's a serious advantage when you need to make an extra special impression with a mind-blowing multimedia experience.



3122 435 95510 04/02
*Currently only available in the US and western Europe.
Check with your Philips dealer and/or warranty card for more details.

Let's make things better.



PHILIPS