

VPL-CX11

LCD
Projector

Enlighten
your
audience ...

Enhance
your image.



this is not a rehearsal.

www.sonypresentation.com

SONY



Impact and Style

The VPL-CX11 projector is ideal for various types of in-house meetings and presentations. It is portable but can also be installed. It is quick to set up and easy to give effective presentations thanks to the supplied software and remote control. Image quality is outstanding and its bright output (1,500 ANSI lumens) means that it can be used in large rooms even with the lights on. It is stylishly designed, looking smart even when seen from the back. Handy features provide extra versatility and maximum quality at all times.



RM-PJM10



4-times Digital Zoom





Bright and Compact Multi-Purpose Projector

The VPL-CX11 offers an excellent light output of 1,500 ANSI lumens. It comes in a small package and is easy to carry with a carrying handle. You can also use this in a variety of installation situations – for ceiling, floor or rear projection – so you can project your images in any setting.

High Image Quality

The VPL-CX11 provides true XGA (1024 x 768) resolution, utilising three 0.9-inch LCD panels. The details of the original images are maintained, while rich and natural colours are reproduced.

Remote Control Function

The supplied RM-PJM10 remote control unit has an integrated mouse function for point-and-click control of your connected computer. You can also control the 4-times Digital Zoom function with this remote control unit, zooming in on a section of the presentation for more detail.

Advanced APA

Dot phase and image size or shift can be automatically adjusted to their optimal settings just by pressing the APA (Auto Pixel Alignment) button.



Digital Keystone Adjustment

Keystone distortion caused by the projection angle can be electronically corrected, up to ± 15 degrees, via the on-screen menu. You will be able to project square and detailed images on to the screen even with limited setup space.

Quiet Operation

With an innovative cooling structure using a sirocco fan, the VPL-CX11 operates with a low noise level. The projector provides undisturbed, smooth presentations.

Simple Setup

Setting up the VPL-CX11 with a computer is very simple. The rear panel cover reveals only the cable connectors needed for typical computer presentations (AC cable connector and D-sub 15-pin connector) while covering up the rest of the connectors. Also, 37 preset signal formats cover all video formats used worldwide and PC signals up to SXGA, eliminating the trouble of complex adjustments.

On-screen Display

The on-screen display menu comes in seven languages: English, French, Spanish, German, Italian, Japanese and Chinese.

Stereo Speakers

The VPL-CX11 comes fully equipped with stereo speakers, to complement your presentation visuals.

USB Compatibility and PROJECTOR STATION Software

The VPL-CX11 is USB-ready, and it serves as a USB hub for daisychain connection of multiple devices. With the USB connection the projector can be controlled by a computer, using the PROJECTOR STATION* USB application software. The software also helps you organise your presentation materials for quick access - you can open the files registered in the software with the function keys on the remote control unit.

* PROJECTOR STATION version 3.0 software requirements: Microsoft® Windows® 98, Windows® 98 SE, Windows Me or Windows® 2000 operating system.



Projector Station version 3.0

Specifications

VPL-CX11	
OPTICAL	
Projection system	3 LCD panels, 1 lens projection system
LCD panel	0.9-inch p-Si TFT LCD panel with Micro Lens Array 2,359,296 pixels (786,432 pixels x 3)
Projection lens	1.3 times zoom lens, F1.7 to 2.2, f33.6 to 42 mm
Lamp	132 W UHP lamp
Screen coverage	40 to 300 inches (viewable area, measured diagonally)
Light output	1500 ANSI lumens*1
Throwing distance	
40-inch	1470 to 1770 mm
60-inch	2230 to 2680 mm
80-inch	3000 to 3600 mm
100-inch	3760 to 4510 mm
120-inch	4530 to 5430 mm
150-inch	5670 to 6800 mm
200-inch	7590 to 9090 mm
300-inch	11410 to 13660 mm

SIGNALS	
Colour system	NTSC, PAL, SECAM, NTSC4.43, PAL-M, PAL-N
Resolution	VIDEO: 750 TV lines, RGB: 1024 x 768 pixels
Acceptable signals	RGB (fH: 15 to 91 kHz, fV: 43 to 85 Hz), 15 kHz component 50/60 Hz system, composite video, Y/C video

GENERAL	
Cabinet colour	Silky Silver
Speaker	Max. 0.5 W x 2 (stereo)
Power requirements	AC 100 to 240 V, 50/60 Hz
Power consumption	Max. 200 W, Standby approx. 5 W
Operating temperature	0 to 35 °C (32 to 95 °F)
Operating humidity	35 to 85%
Dimensions*2	285 (W) x 76 (H) x 249.5 (D) mm (11 1/4 x 3 x 9 7/8 inches)
Mass	Approx. 3.3 kg (7 lb 4 oz)
Heat dissipation	682.5 BTU


INPUTS/OUTPUTS	
VIDEO IN	
Composite	Phono type, 1.0 Vp-p ±2 dB, sync negative, 75 Ω
Y/C IN	Mini DIN 4-pin
Y	1.0 Vp-p ±2 dB, sync negative, 75 Ω
C	Burst 0.286 Vp-p ±2 dB (NTSC), 75 Ω or 0.3 Vp-p ±2 dB (PAL), 75 Ω
INPUT A	
Analogue RGB/Component	HD D-sub 15-pin (female)
R/R-Y	0.7 Vp-p ±2 dB, positive, 75 Ω
G	0.7 Vp-p ±2 dB, positive, 75 Ω
G with Sync/Y	1.0 Vp-p ±2 dB, sync negative, 75 Ω
B/B-Y	0.7 Vp-p ±2 dB, positive, 75 Ω
SYNC/HD	
Composite sync	1.0 to 5.0 Vp-p, high impedance positive/negative
Horizontal sync	1.0 to 5.0 Vp-p, high impedance positive/negative
VD	
Vertical sync	1.0 to 5.0 Vp-p, high impedance positive/negative
MOUSE IN	6-pin (female)
USB HUB	Up (B type female) x 1, Down (A type female) x 1
AUDIO IN	INPUT A: Stereo mini jack, 500 mV rms, impedance more than 47 kΩ VIDEO: Stereo mini jack, 500 mV rms, impedance more than 47 kΩ

SAFETY REGULATIONS	
	cUL1950, EN60950, UL1950, CCIIB, FCC class B, IC class B, CE, C-Tick, VCCI B

SUPPLIED ACCESSORIES	
	Remote Commander RM-PJM10, Signal Cable SMF-410 (2 m): HD D-sub 15-pin to D-sub 15-pin, PS/2 Mouse Cable (2 m), Audio Visual Cable (2 m), USB Cable (2 m): A type to B type, USB Application Software PROJECTOR STATION version 3.0, AA size Battery (2), Air Filter, AC Power Cord, Operation Manual, Quick Reference Sheet, Lens Cap

*1 ANSI lumens is a measuring method of the American National Standards Institute IT7.228.
*2 Excluding protruding parts.

Connectors (with cover open)

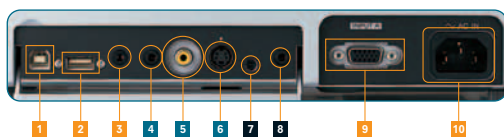


- 1 USB connector (USB B-plug for upstream)
- 2 USB connector (USB A-plug for downstream)
- 3 CONTROL S PLUG IN POWER

- 4 VIDEO IN
- 5 AUDIO
- 6 S VIDEO

- 7 INPUT A
- 8 MOUSE
- 8 AUDIO

- 9 Input A
- 10 AC 100 V / 240 V

Control Panel

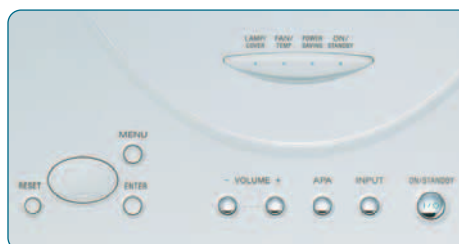

© 2001 Sony Corporation. All rights reserved. Reproduction in whole or in part without permission is prohibited. Features and specifications are subject to change without notice. All non-metric weights and measures are approximate. Sony is a registered trademark of Sony Corporation. Macintosh is a registered trademark of Apple Computer, Inc. Microsoft and Windows are registered trademarks of Microsoft Corporation.

CA VPL-CX11/GB- / /2001

Preset Data of Input Signals

Memory No.	Preset Signal	fH (kHz)	fV (Hz)	H/V Polarity
1	Video 60 Hz	15.734	59.940	N/N
2	Video 50 Hz	15.625	50.000	N/N
3	15 K RGB/Component 60 Hz	15.734	59.940	S on G
4	15 K RGB/Component 50 Hz	15.625	50.000	S on G
5				
6	640 x 350 VGA mode 1	31.469	70.086	P/N
7	VGA VESA 85 Hz	37.861	85.080	P/N
8	640 x 400 PC-9801 Normal	24.823	56.416	N/N
9	VGA mode 2	31.469	70.086	N/P
10	VGA VESA 85 Hz	37.861	85.080	N/P
11	640 x 480 VGA mode 3	31.469	59.940	N/N
12	Macintosh 13"	35.000	66.667	S on G
13	VGA VESA 72 Hz	37.861	72.809	N/N
14	VGA VESA 75 Hz	37.500	75.000	N/N
15	VGA VESA 85 Hz	43.269	85.008	N/N
16	800 x 600 SVGA VESA 56 Hz	35.156	56.250	P/P
17	SVGA VESA 60 Hz	37.879	60.317	P/P
18	SVGA VESA 72 Hz	48.077	72.188	P/P
19	SVGA VESA 75 Hz	46.875	75.000	P/P
20	SVGA VESA 85 Hz	53.674	85.061	P/P
21	832 x 624 Macintosh 16"	49.724	74.550	N/N
22	1024 x 768 XGA VESA 43 Hz	35.524	43.479	P/P
23	XGA VESA 60 Hz	48.363	60.004	N/N
24	XGA VESA 70 Hz	56.476	70.069	N/N
25	XGA VESA 75 Hz	60.023	75.029	P/P
26	XGA VESA 85 Hz	68.677	84.997	P/P
27	1152 x 864 SXGA VESA 70 Hz	63.995	70.016	P/P
28	SXGA VESA 75 Hz	67.500	75.000	P/P
29	SXGA VESA 85 Hz	77.487	85.057	P/P
30	1152 x 900 Sunmicro LO	61.795	65.960	N/N
31	Sunmicro HI	71.713	76.047	C Neg
32	1280 x 960 SXGA VESA 60 Hz	60.000	60.000	P/P
33	SXGA VESA 75 Hz	75.000	75.000	P/P
34	1280 x 1024 SXGA VESA 43 Hz	46.433	43.436	P/P
35	SXI-5	53.516	50.062	S on G
36	SXGA VESA 60 Hz	63.974	60.013	P/P
37	SXGA VESA 75 Hz	79.976	75.025	P/P
38	SXGA VESA 85 Hz	91.146	85.024	P/P

* Images may not be reproduced correctly when signals other than the above are input.

Optional Accessories

Suspension Support
PSS-610

Signal Cables
SMF-400
(HD D-sub 15-pin to 5 BNC, for RGB signal)

SMF-402
(HD D-sub 15-pin to phono x 3, for component signal)

SMF-410
(HD D-sub 15-pin to HD D-sub 15-pin, for RGB signal)

50-inch Portable Screen
VPS-50C*

Projector Lamp (for replacement)
LMP-C160



LMP-C160

* Not available in some areas. For details, please contact your nearest Sony office.

Distributed by